


STACKED WOOD

HERALDRY WALL PANEL

PRECAUTIONS

Always wear work gloves and safety glasses when installing the product.



Stacked Wood guarantees the conformity of its products when they are installed according to the installation instructions and are maintained in an environment where ambient humidity ranges between 35% and 55%: before, during and after installation.

LEAVE THE BOX IN THE ROOM IT IS TO BE INSTALLED FLAT ON THE FLOOR IN ITS ORIGINAL WRAPPING UNTIL INSTALLATION.

INSTALLATION INSTRUCTIONS


Tools :

- 100% polyurethane construction glue (3 tubes per 100 ft² or 10 m²)
- Caulking gun
- Electric mitre saw
- Table saw
- Level
- Mesuring tape
- Cutter
- Pneumatic finish hammer (#23 gauge finish nail)
- Stepladder


MAKE SURE YOUR KNIVES AND SAWBLADES ARE IN PRIME CONDITION.

First, check the wall(s) is level from floor to ceiling and edge-to-edge. If not, adjust accordingly.


STEP 1: Cut any excess tab of the wall panel.

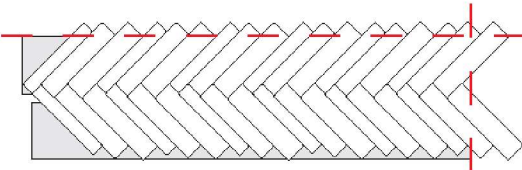


STEP 2: A: Apply a line of 100% polyurethane glue in the form of a rectangle (1/2" (1,3 cm) from edges) and a X inside the rectangle.

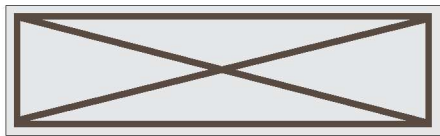


B: Apply glue at the edge.

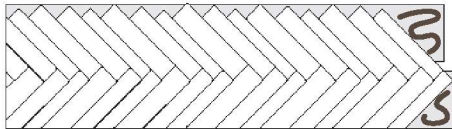

STEP 3: Position the first panel vertically at the bottom right. Make sure each panel and column are level.

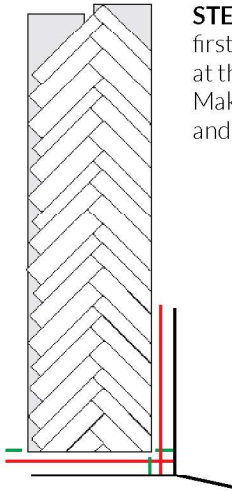

STEP 4: Nail the panel in place with #23 gauge nails on the contour lips.

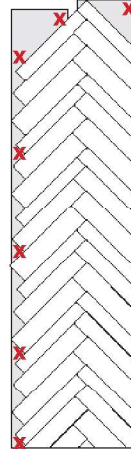

STEP 5: → **Installation of subsequent panels**

- Repeat the gluing procedure
- Align panel **B** against **A**
- Repeat the nailing procedure

STEP 6:


End a column

Cut any excess of the wall panel to be flush with the edge of the wall.

STEP 7:

Start a new column

Use the remaining piece from the previous column and cut to fit. Repeat step 2 and add glue on the vacant backing of the adjacent wall panel installed.

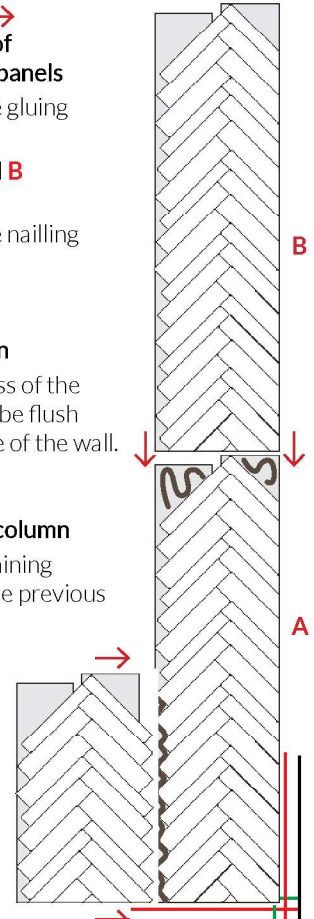

STEP 8:

Last column

Cut the panel on the left to fit.

NOTE: if wood pieces detaches from a wall panel, reposition using 100% polyurethane glue.

THE WALL PANEL NEEDS TO BE GLUED AND NAILED FOR A SUCCESSFUL INSTALL AND TO PREVENT FUTURE WARPING. FAILURE TO COMPLY WITH THE INSTALLATION INSTRUCTIONS SHALL VOID THE APPLICATION OF THE WARRANTY.

Do not install over material other than drywall or plywood.